



VZS Series

Features

- $5\phi \sim 10\phi$, 105°C , 2,000 hours assured
- Low impedance 30 ~ 50% less than VZH series
- Large capacitance with ultra low impedance capacitors
- Designed for surface mounting on high density PC board
- RoHS compliant
- AEC-Q200 compliant




Marking color: Black

Specifications

Items	Performance																					
Category Temperature Range	-55°C ~ +105°C																					
Capacitance Tolerance	±20% (at 120 Hz, 20°C)																					
Leakage Current (at 20°C)	I = 0.01CV or 3 (μA) whichever is greater (after 2 minutes) Where, C = rated capacitance in μF , V = rated DC working voltage in V																					
Tanδ (at 120 Hz, 20°C)	<table border="1"> <thead> <tr> <th>Rated Voltage</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> </tr> </thead> <tbody> <tr> <td>Tanδ (max)</td> <td>0.30</td> <td>0.26</td> <td>0.22</td> <td>0.16</td> <td>0.13</td> <td>0.10</td> </tr> </tbody> </table> <p>When the capacitance exceeds 1,000μF, 0.02 shall be added every 1,000μF increase.</p>	Rated Voltage	6.3	10	16	25	35	50	Tanδ (max)	0.30	0.26	0.22	0.16	0.13	0.10							
Rated Voltage	6.3	10	16	25	35	50																
Tanδ (max)	0.30	0.26	0.22	0.16	0.13	0.10																
Low Temperature Characteristics (at 120 Hz)	<p>Impedance ratio shall not exceed the values given in the table below.</p> <table border="1"> <thead> <tr> <th>Rated Voltage</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> </tr> </thead> <tbody> <tr> <td>Impedance Ratio</td> <td>Z(-25°C)/Z(+20°C)</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td></td> <td>Z(-55°C)/Z(+20°C)</td> <td>8</td> <td>5</td> <td>4</td> <td>3</td> <td>3</td> </tr> </tbody> </table>	Rated Voltage	6.3	10	16	25	35	50	Impedance Ratio	Z(-25°C)/Z(+20°C)	4	3	2	2	2		Z(-55°C)/Z(+20°C)	8	5	4	3	3
Rated Voltage	6.3	10	16	25	35	50																
Impedance Ratio	Z(-25°C)/Z(+20°C)	4	3	2	2	2																
	Z(-55°C)/Z(+20°C)	8	5	4	3	3																
Endurance	<table border="1"> <thead> <tr> <th>Test Time</th> <th>2,000 Hrs</th> </tr> </thead> <tbody> <tr> <td>Capacitance Change</td> <td>Within ±30% of initial value</td> </tr> <tr> <td>Tanδ</td> <td>Less than 300% of specified value</td> </tr> <tr> <td>Leakage Current</td> <td>Within specified value</td> </tr> </tbody> </table> <p>* The above specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied for 2,000 hours at 105°C.</p>	Test Time	2,000 Hrs	Capacitance Change	Within ±30% of initial value	Tanδ	Less than 300% of specified value	Leakage Current	Within specified value													
Test Time	2,000 Hrs																					
Capacitance Change	Within ±30% of initial value																					
Tanδ	Less than 300% of specified value																					
Leakage Current	Within specified value																					
Shelf Life Test	Test time: 1,000 hours; other items are the same as those for the Endurance.																					
Ripple Current and Frequency Multipliers	<table border="1"> <thead> <tr> <th>Frequency (Hz)</th> <th>50, 60</th> <th>120</th> <th>1k</th> <th>10k up</th> </tr> </thead> <tbody> <tr> <td>Multiplier</td> <td>0.60</td> <td>0.70</td> <td>0.85</td> <td>1.0</td> </tr> </tbody> </table>	Frequency (Hz)	50, 60	120	1k	10k up	Multiplier	0.60	0.70	0.85	1.0											
Frequency (Hz)	50, 60	120	1k	10k up																		
Multiplier	0.60	0.70	0.85	1.0																		

Diagram of Dimensions


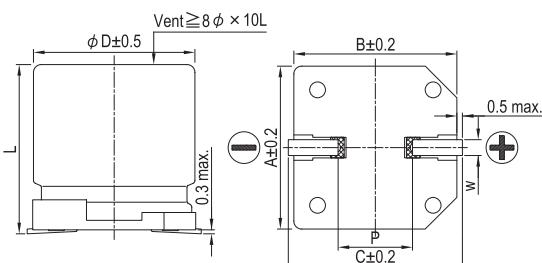


Lead Spacing and Diameter Unit: mm						
φD	L	A	B	C	W	P ± 0.2
5	5.8 ± 0.3	5.3	5.3	5.9	0.5 ~ 0.8	1.5
6.3	5.8 ± 0.3	6.6	6.6	7.2	0.5 ~ 0.8	2.0
6.3	7.7 ± 0.3	6.6	6.6	7.2	0.5 ~ 0.8	2.0
8	6.5 ± 0.3	8.3	8.3	9.0	0.5 ~ 0.8	2.3
8	10 ± 0.5	8.3	8.3	9.0	0.7 ~ 1.1	3.1
10	10 ± 0.5	10.3	10.3	11	0.7 ~ 1.3	4.7
10	12.5 ± 0.5	10.3	10.3	11	0.7 ~ 1.3	4.7

Marking

$\phi D \leq 6.3 \text{ mm}$

$\phi D = 8 \sim 10 \text{ mm}$

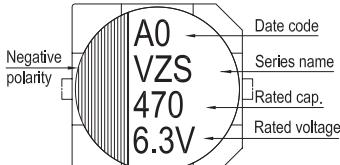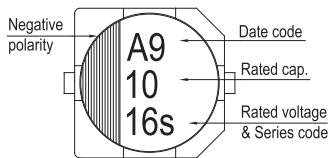

Dimension: $\phi D \times L(\text{mm})$

Ripple Current: mA/rms at 100k Hz, 105°C

Impedance: Ω at 100k Hz, 20°C

Dimension and Permissible Ripple Current

Cap. (μF)	Rated Volt. (V _{DC})	6.3V (0J)			10V (1A)			16V (1C)			25V (1E)			35V (1V)			50V (1H)		
		ϕ D×L	Imp.	mA	ϕ D×L	Imp.	mA	ϕ D×L	Imp.	mA	ϕ D×L	Imp.	mA	ϕ D×L	Imp.	mA	ϕ D×L	Imp.	mA
22	220							5×5.8	0.36	240	5×5.8	0.36	240	5×5.8	0.36	240			
33	330				5×5.8	0.36	240				5×5.8	0.36	240	6.3×5.8	0.26	300			
47	470	5×5.8	0.36	240				5×5.8 6.3×5.8	0.36 0.26	240	6.3×5.8	0.26	300	6.3×5.8	0.26	300			
68	680							6.3×5.8	0.26	300	6.3×5.8	0.26	300	6.3×7.7	0.16	600			
100	101	5×5.8 6.3×5.8	0.36 0.26	240 300	5×5.8	0.36	240	6.3×5.8 6.3×7.7	0.26 0.16	300 600	6.3×5.8 6.3×7.7 8×6.5	0.26 0.16 0.18	300 600 500	8×10	0.08	850	8×10	0.18	670
150	151				6.3×5.8	0.26	300	6.3×7.7	0.16	600	8×10	0.08	850	8×10	0.08	850			
220	221	6.3×5.8	0.26	300	6.3×7.7 8×6.5	0.16 0.18	600 500	6.3×7.7 8×6.5 8×10	0.16 0.18 0.08	600 500 850	8×10	0.08	850				10×10	0.15	900
330	331	6.3×7.7 8×6.5	0.16 0.18	600 500	8×10	0.08	850	8×10	0.08	850				10×10	0.06	1,190			
470	471	8×10	0.08	850	8×10	0.08	850	8×10	0.08	850	10×10	0.06	1,190	10×12.5	0.06	1,190			
680	681	8×10	0.08	850	8×10	0.08	850	10×10	0.06	1,190	10×12.5	0.06	1,190						
1,000	102				10×10	0.06	1,190	10×10	0.06	1,190									
1,500	152	10×10	0.06	1,190	10×12.5	0.06	1,190												
2,200	222	10×12.5	0.06	1,190															

Part Numbering System

VZS Series	470μF	±20%	6.3V	Carrier Tape	8ϕ×10L	General Purpose
VZS	471	M	0J	TR	0810	
Series Name	Capacitance	Capacitance Tolerance	Rated Voltage	Package Type	Terminal Type	Case Size

Note: For more details, please refer to "Part Numbering System - SMD Type" on page 106.